
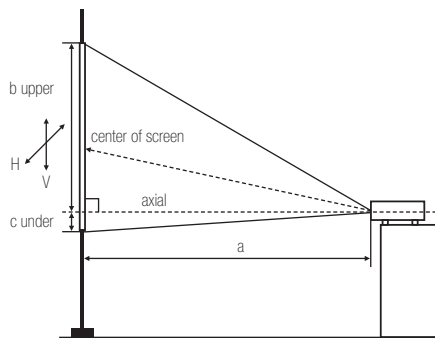


CP-EU4501WN

3LCD Lamp projector, 4500 ANSI Lumens, 16,000:1 contrast ratio, WUXGA (1920 x 1200) resolution

HITACHI
Inspire the Next

Technical Specifications

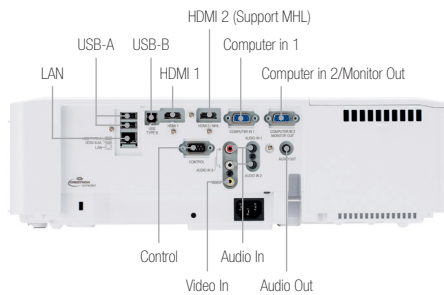

a: Projection distance from centre of lens to the screen.

THROW CHART 16:10 ASPECT RATIO (BUILT-IN LENS)

Screen size (diagonal)	HxV		Projection distance (a)		Screen height (cm)	
	(m)	(m)	Wide (m)	Tele (m)	b upper	c under
30" (0.8 m)	0.6	0.4	0.8	1.3	35	5
60" (x.x m)	1.3	0.8	1.7	2.7	70	10
80" (2.0 m)	1.7	1.1	2.2	3.6	94	14
100" (2.5 m)	2.2	1.3	2.8	4.5	117	17
120" (3.0 m)	2.6	1.6	3.4	5.5	141	21
200" (5.1 m)	4.3	2.7	5.6	9.1	234	35
300" (7.6 m)	6.5	4.0	8.5	13.7	352	52

THROW CHART 16:9 ASPECT RATIO (BUILT-IN LENS)

Screen size (diagonal)	HxV		Projection distance (a)		Screen height (cm)	
	(m)	(m)	Wide (m)	Tele (m)	b upper	c under
30" (0.8 m)	0.7	0.4	0.8	1.4	34	3
60" (x.x m)	1.3	0.7	1.7	2.8	68	7
80" (2.0 m)	1.8	1.0	2.3	3.7	91	9
100" (2.5 m)	2.2	1.2	2.9	4.7	114	11
120" (3.0 m)	2.7	1.5	3.5	5.6	136	13
200" (5.1 m)	4.4	2.5	5.8	9.4	227	22
300" (7.6 m)	6.6	3.7	8.7	14.1	341	33

Hitachi Throw Calculator:

<http://www.hitachidigitalmedia.com/en-gb/throw-distance-calculator>

OPTICAL

Display System	3LCD (0.64 inches) aspect ratio 16:10
Resolution	WUXGA (1920 x 1200)
Light Output (Brightness) ANSI Lumens	4500 (Normal), ,
Contrast Ratio	16,000:1
Lamp Life (Hours)	4500 (Normal), 6000 (Eco)
Lens	Built-in
Lens Zoom	Manual Zoom x 1.6
Lens Focus	Manual Focus
Lens Shift	Not Supported
Projection Lens F Number	1.7 - 2.2
Focus Distance	0.8m – 13.7m
Distance to Width Ratio/ Throw Ratio (:1)	1.3 – 2.1
Diagonal Display Size	30 – 300 inches

FEATURES

Installation	Ceiling, Tabletop, Rear
Speakers	16W Mono
Digital Keystone	TBC
Picture Modes	TBC
Picture Adjustments	TBC
Network Features	Wireless Capability(Optional), Multi Projector, Moderator Control Mode, Projector Quick Connection (ios / Android app), Projector Monitoring and Control from a Remote Location, E-mail Alerts
Security Features	Password/Myscreen Password, Pin Lock, Key Lock
Supported Languages	English, French, Germany, Spanish, Italian, Norwegian, Dutch, Portuguese, S-Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish

COMPATIBILITY

Computer	TBC
Video	TBC

CONNECTIONS

Digital Input	HDMI x 2 (HDCP compliant, HDMI 2 shared with MHL)
Analogue Input	15-pin Mini-D-Sub x 2, RCA Jack x 1
Video Output	15 pin Mini D-Sub x 1
Audio Input	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1
Audio Output	3.5mm Stereo Mini Jack x 1
RS-232C Control	1 x 9-pin D-Sub
Wireless LAN	Yes (Optional)
Wired LAN	RJ45 connector x 1
USB Type-A	USB type A x 2 (PC less Presentation or Wireless adapter)
USB Type-B	USB type B x 1
Wired Remote I/O	Not Supported

POWER

Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)
Power Consumption Operating / Standby	TBC / Less than 0.5W

PHYSICAL

Weight	5kg
Dimensions (W x H x D)	413 x 315 x 123mm
Operation Noise	37db (Normal), 29db (Eco)

CERTIFICATION

Certification	TBC
---------------	-----

ACCESSORIES

Supplied Accessories	Power Cable, Computer Cable, Remote controller with the two AA batteries, Lens Cover and cap, Adapter Cover(for USB Wireless Adapter), Security Label, User's Manual CD, application CD
Optional Accessories	USB-WL-11N (wireless adapter)

WARRANTY

Replacement Lamp / Filter	DT02061 (Lamp)
Projector / Lamp Warranty	TBC